



CBL 410 PCC

BEDIENUNGSANLEITUNG S. 2
Bitte vor Inbetriebnahme des Gerätes lesen!

USER INSTRUCTIONS p. 4
Please read the manual before using the equipment!

MODE D'EMPLOI p. 6
Veuillez lire cette notice avant d'utiliser le système!

ISTRUZIONI PER L'USO p. 8
Prima di utilizzare l'apparecchio, leggere il manuale!

INSTRUCCIONES p. 10
¡Sirvase leer el manual antes de utilizar el equipo!

INSTRUÇÕES DE USO p. 12
Por favor, leia este manual antes de usar o equipamento!



Introduction

Thank you for purchasing an AKG product. This microphone provides optimum intelligibility and audio quality for your meetings.

The CBL 410 PCC is also an excellent choice for recording applications.

Please take a few minutes to **read the instructions, specifically the “Safety” and “Environment” sections, carefully before operating the equipment.** Please keep the Manual for future reference.

Use


Single-microphone Setup

Insert the plug on the cable of your CBL 410 PCC into the microphone input jack on your computer. The microphone is a true “plug and play” device, so there is no need to install a driver.

Place the microphone as far away from any loud-speaker as possible and as close as possible to the talker. Your microphone is now ready to operate.

Multiple Microphones

For online meetings with several talkers at your end of the line, you will need more than one CBL 410 PCC to capture all voices in the best possible way.

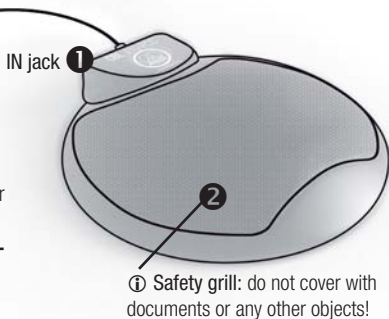

Follow the instructions in “Single-microphone Setup”.

Connect the second microphone to the IN jack ❶ on the first microphone, the third microphone to the second one, and so on. Do not “daisy-chain” more than four microphones in this way. Five or more microphones would overload the microphone power supply on your computer, resulting in audibly deteriorating sound quality. Place the microphones on the conference table such that no talker will be further away from a microphone than 60 to 80 cm (24 to 30 inches). The 1-m (3-ft. 4-in.) microphone cable should normally be long enough for the purpose unless the table is too wide (see page 14). After the conference, simply dismantle all connected microphones and bring into their default state.

Features

- Small and inconspicuous
- Light
- Exceptionally rugged
- Excellent sound quality
- High sensitivity
- Low self-noise

Cleaning

To clean metal surfaces, use industrial spirits or alcohol.

Safety

- 1. Please make sure that the piece of equipment your microphone will be connected to fulfills the safety regulations in force in your country and is fitted with a ground lead.**
- 2. In order to prevent electric shock, make sure that neither you nor your children insert the plug on the microphone into any power outlet.**

This product conforms to the standards listed in the related Declaration of Conformity. To order a free copy of the Declaration of Conformity for this product, visit <http://www.akg.com> or contact sales@akg.com.

5. Specifications

| | |
|------------------------------|------------------------------------|
| Polar pattern: | omnidirectional |
| Type: | back electret condenser microphone |
| Frequency response: | 50 Hz to 20 kHz |
| Impedance: | 2000 ohms \pm 30% at 1000 Hz |
| Sensitivity: | -42 dB \pm 3 dB (7.9 mV/Pa) |
| Maximum current consumption: | 0.5 mA |
| Supply voltage: | 1.5 to 5 V DC |
| Cable length: | 100 cm (3 ft. 4 in.) |
| Connector: | TRS mini jack |

Mehrfachanwendung


Multiple Microphones

Plusieurs utilisateurs

Applicazione multipla

Aplicación múltiple

Aplicação múltipla

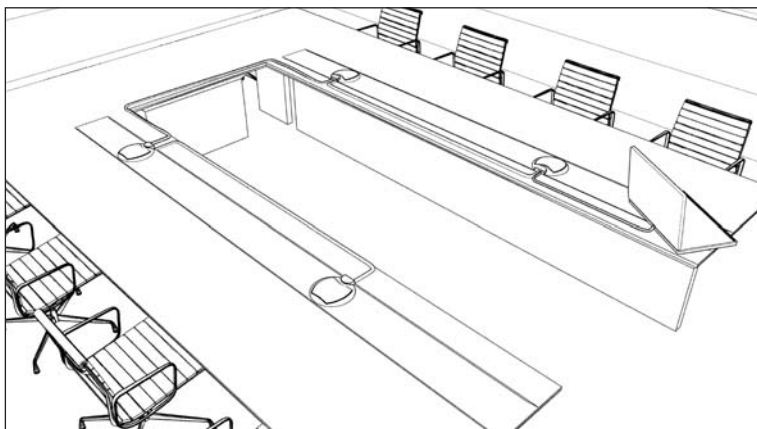

Umwelt

1. Wenn Sie das Gerät verschrotten, trennen Sie Gehäuse, Elektronik und Kabel und entsorgen Sie alle Komponenten gemäß den dafür geltenden Entsorgungsvorschriften.
2. Die Verpackung ist wiederverwertbar. Entsorgen Sie die Verpackung in einem dafür vorgesehenen Sammelsystem.

Environment

1. When scrapping the equipment, separate the case, circuit boards, and cables, and dispose of all components in accordance with local waste disposal rules.
2. The packaging of the equipment is recyclable. Dispose of the packaging as required under local legislation relating to waste disposal and recycling.

Environnement

1. Si vous mettez le micro à la ferraille, démontez boîtier, électronique et câbles et éliminez chacun de ces éléments conformément aux prescriptions en vigueur.
2. L'emballage est recyclable. Déposez l'emballage dans un récipient de collecte prévu à cet effet.

Ambiente

1. Se rottamate l'apparecchio, separate scatola, parti elettroniche e cavi e smaltite tutti i componenti secondo le norme di smaltimento vigenti al riguardo.
2. L'imballaggio è riciclabile. Smaltite l'imballaggio in un apposito sistema di raccolta.

Medio ambiente

1. Para deshacerse del aparato, desármelo separando caja, electrónica y cables, y elimine cada uno de los componentes cumpliendo con las correspondientes disposiciones vigentes para la eliminación de residuos.
2. El embalaje es reciclable. Elimine el embalaje en un sistema de recogida previsto para ello.

Meio ambiente

1. Quando pretende desfazer-se do aparelho, separe a carcaça, a eletrônica e os cabos e respeite os regulamentos de coleta de lixo quando o joga fora.
2. A embalagem é reciclável. Elimine a embalagem num sistema de coleta apropriado.

Mikrofone · Kopfhörer · Drahtlosmikrofone · Drahtloskopfhörer · Kopfsprechgarnituren · Akustische Komponenten
Microphones · Headphones · Wireless Microphones · Wireless Headphones · Headsets · Electroacoustical Components
Microphones · Casques HiFi · Microphones sans fil · Casques sans fil · Micros-casques · Composants acoustiques
Microfoni · Cuffie HiFi · Microfoni senza filo · Cuffie senza filo · Cuffie-microfono · Componenti acustici
Micrófonos · Auriculares · Micrófonos inalámbricos · Auriculares inalámbricos · Auriculares con micrófono · Componentes acústicos
Microfones · Fones de ouvido · Microfones s/fios · Fones de ouvido s/fios · Microfones de cabeça · Componentes acústicos

AKG Acoustics GmbH

Lemböckgasse 21–25, A-1230 Vienna/AUSTRIA, phone: +43 1 86654 0

e-mail: sales@akg.com

AKG Acoustics, U.S.

8400 Balboa Boulevard, Northridge, CA 91329, U.S.A., phone: +1 818 920 3212

e-mail: akgusa@harman.com

For other products and distributors worldwide visit www.akg.com

Specifications subject to change without notice.



Technische Änderungen vorbehalten. Specifications subject to change without notice. Ces caractéristiques sont susceptibles de modifications. Ci riserviamo il diritto di effettuare modifiche tecniche. Nos reservamos el derecho de introducir modificaciones técnicas. Reservado o direito de alterações técnicas.

Printed in the Republic of the Philippines. 9100 U 13990

