



Headmic 4

Headworn Microphone

FEATURES

- Modular system – cable, clips and windshields are easily interchangeable. Headmic 4 comes with both 3.5 mm jack and 3-pin connector cables
- Outstanding sound quality and excellent feedback rejection
- Sleek and unobtrusive appearance
- Extremely lightweight but sturdy metal frame
- Individually adjustable for all head sizes
- Twist-proof microphone boom (Ø 1.1 mm) can be attached to the left or right side
- Soft case for convenient transport and storage
- Available in beige, black and silver

High-quality, permanently polarized condenser headmic with cardioid pick-up pattern, designed for professional applications. The adjustable neckband is visually unobtrusive and comfortable to wear. This ultra-lightweight (7 g) yet robust headmic features a KE 4 cardioid mic capsule, comes with two connector options (3.5 mm jack and 3-pin) and is available in 3 color variants (beige, black and silver). It is compatible with all Sennheiser bodypack transmitters.



DELIVERY INCLUDES

- Headmic 4
- Connection cable with 3.5 mm jack plug or 3-Pin connector
- MZW 44 windshield
- Soft case
- Quick guide
- Safety instructions

PRODUCT VARIANTS

| | |
|-------------------------------------|----------------|
| HEADMIC 4 BE, EW - beige | Art.No. 509494 |
| HEADMIC 4 BK, EW - black | Art.No. 509495 |
| HEADMIC 4 SB, EW - silver | Art.No. 509496 |
| HEADMIC 4 BE, 3-PIN - beige | Art.No. 509497 |
| HEADMIC 4 BK, 3-PIN - black | Art.No. 509498 |
| HEADMIC 4 SB, 3-PIN - silver | Art.No. 509499 |

ACCESSORIES

| | |
|-----------------------------|----------------|
| MZW 44 BE - beige | Art.No. 700057 |
| MZW 44 BK - black | Art.No. 700060 |
| CLIPSET HEADMIC BOOM | Art.Nr. 509488 |

SPECIFICATIONS

| | |
|----------------------------|--|
| Frequency response | 20 to 20,000 Hz ± 2.5 dB |
| Pick-up pattern | cardioid |
| Nominal impedance | 1.2 kΩ |
| Min. terminating impedance | 4.7 kΩ |
| Sensitivity | 8 mV/Pa ± 2.5 dB |
| Diameter of mic capsule | 4.7 mm |
| Max. sound pressure level | 143 dB |
| Equivalent noise level | 30 dB(A) |
| Supply current | approx. 240 µA |
| Power supply | 4.5 to 15 V |
| Temperature range | Operation: -10 °C to 50 °C (14 °F to 122 °F) Storage: -20 °C to 70 °C (-4 °F to 158 °F) |
| Relative air humidity | max. 90 % |
| Cable length | 1.6 m |
| Diameter of boom arm | 1.1 mm |
| Connector | 3.5 mm jack plug or 3-Pin connector |
| Weight (without cable) | approx. 7 g |




Headmic 4

Headworn Microphone

DIMENSIONS

Cable with 3,5 mm jack plug - screwable

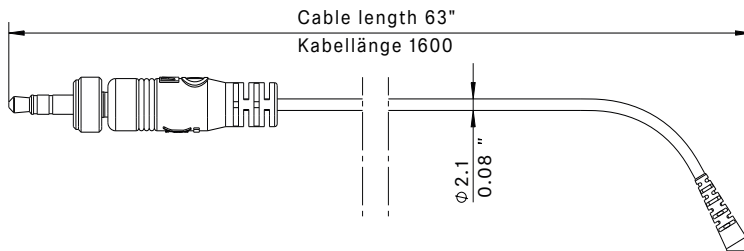

Cable with 3-pin special connector

