



## Features

- The DriveCore™ Install Series represents the latest in amplifier technology. Based on Crown's proprietary and patented DriveCore technology, these amplifiers are the next generation of PWM technology using cutting edge Class D amplifier topologies.
- True Rack Density – power points of 300W or 600W in 2/4/8 channel configurations and 1250W in 2/4 channel configurations. Includes bridgable outputs of 300-2500W, all in a 2U form factor, providing flexibility in designs.
- Minimum Guaranteed Power Ratings – DCi amplifiers are guaranteed to deliver at least the rated power in the specifications over a longer period of time than any other competing amplifier.
- Direct Drive "Constant Voltage" capabilities on a channel by channel basis for 70Vrms or 100Vrms amplification without the use of a step up frequency limiting transformer for higher audio quality.
- Audio Architect supported amplifier.
- Advanced PFC universal power supply provides market-leading efficiency, and is designed to deliver maximum power no matter where the amplifier is located. Universal AC input accepts 100 – 240VAC, 50/60Hz ( $\pm 10\%$ ).
- DriveCore includes five patents that are also included in Crown's flagship touring amplifier I-Tech HD4, providing best-in-class versatility and durability.
- TCP/IP based protocol in HiQnet for network monitoring and control. Allows amplifier to coexist on a standard network back bone.
- Revolutionary cooling system, focuses airflow on parts that need it most, maximizing efficiency while minimizing heat and noise.
- BLU Link compatibility – low latency, fault tolerant, digital audio bus, capable of routing 256 channels using standard Category 5e cabling (over a distance of 100m between devices), provides an unprecedented level of routing flexibility.

### Network Monitoring and Control features include:

- Continuous Load Monitoring
- Comprehensive Error Reporting
- Pilot Tone Monitoring
- Programmable General Purpose Input/Output (GPIO) Ports

### Digital Signal Processing (DSP) features include:


- LevelMAX™ Limiters for Inputs and Outputs with Thermal Limiting
- Input Compressor
- Input and Output Delay
- Input and Output EQ
- Signal Generator
- Crossover

INSTALLS ANYWHERE. OUTPERFORMS EVERYTHING.


# DCi Network



8|600 N model shown

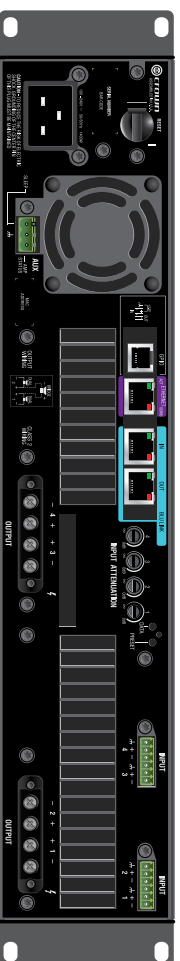

4|1250 N model shown

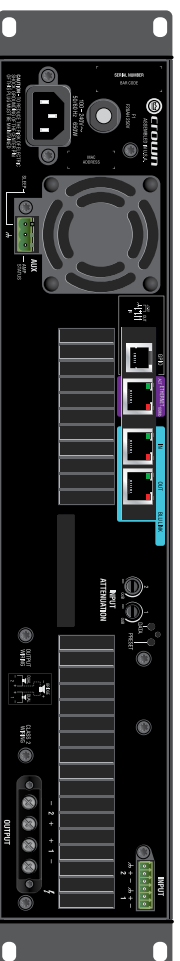

2|1250 N model shown

## Power Matrix

DCi N Model	Channels	2 Ohms	4 Ohms	8 Ohms	70V Vrms	100V Vrms
2 300N	2	150W	300W	300W	300W	300W
2 600N	2	300W	600W	600W	600W	600W
4 300N	4	150W	300W	300W	300W	300W
4 600N	4	300W	600W	600W	600W	600W
8 300N	8	150W	300W	300W	300W	300W
8 600N	8	300W	600W	600W	600W	600W
2 1250N	2	1250W	1250W	1250W	1250W	1250W
4 1250N	4	1250W	1250W	1250W	1250W	1250W

## Performance Specifications

	2 300N	4 300N	8 300N	2 600N	4 600N	8 600N	2 1250N	4 1250N
Frequency Response (8 Ohms; 20 Hz - 20kHz)	±0.25dB							
BLU Link Input Signal to Noise Ratio (A-Weighted)	>104dB							
Total Harmonic Distortion (at full rated power; 20Hz - 20kHz)	0.35%							
Voltage Gain (at Maximum Level Setting)	34dB							
Damping Factor (20 Hz to 100 Hz)	>1000	>1000	>1000	>1000	>1000	>1000	>1500	>1500
Input Impedance (nominal balanced, unbalanced)	10 kOhms, 5 kOhms							
Maximum Input Level before Compression (low Gain Mode)	+20dBu							
Load Impedance Stereo/Dual Mode	2 - 16 Ohms; 70Vrms and 100Vrms							
Load Impedance Bridge Mono	4 - 16 Ohms; 140Vrms and 200Vrms							
Cooling	Continuously variable speed forced air, front to back airflow							
Maximum Fan Noise (re dBA SPL @ 1M)	45	45	47	45	47	45	47	47
Required AC Mains (±10%)	100V - 240V - 50/60Hz							
IEC Power Connector	15A IEC	15A IEC	15A IEC	15A IEC	15A IEC	20A IEC	15A IEC	20A IEC
<b>Physical Specification</b>								
Width	19 in. (48.3cm)							
Height	3.5 in. (8.9cm)							
Depth	14.25 in. (35.63cm) DCi 8 600N & 4 1250N; 17 in. (42.5cm)							
Weight	DCi 2 300N & 2 600N: 18.8lbs (8.53kg); DCi 4 300N & 4 600N: 20.1lbs (9.12kg); DCi 8 300N & 2 1250N: 23.5lbs (10.66kg); DCi 8 600N & 4 1250N: 30lbs (13.60kg)							

Specifications subject to change without prior notice. Latest information available at [www.crownaudio.com](http://www.crownaudio.com). Crown offers a three-year, no-fault, fully transferable warranty for every new Crown amplifier – an unsurpassed industry standard. With this unprecedented no-fault protection, your new Crown amplifier is warranted to meet or exceed original specifications for the first three years of ownership. During this time, if your amplifier fails, or does not perform to original specifications, it will be repaired or replaced at our expense. In most cases, in most cases, the things not covered by this warranty are those losses normally covered by insurance and those caused by intentional abuse. Plus, the coverage is transferable, should you sell your amplifier. See your authorized Crown dealer for full warranty disclosure and details. For customers outside of the USA, please contact your authorized Crown distributors for warranty information or call 574-294-8200. © 2013 Crown Audio®, Inc.